



DESCRIPTION

3NM Masthead, 2NM Port, 2NM Starboard,
2NM Stern, 2NM White, 2NM Red, 2NM Green



Certifications:
ABYC-A16, COLREGS '72.

Visibility/ Intensity/ color/ Source:
225 Degrees 3NM White LED Masthead.
112 Degrees 2NM Port (Red LED) & Starboard (Green LED).
135 Degrees 2NM White LED Stern.
360 Degrees 2NM White, Red, Green.

Base:
Material: Aluminum, 6061, T6511.
Finish: Anodized Black Hardcoat, MIL-A-8625, Type III CL2.

Mounting Options:
End User, 1/4 x 20 x 3/8 deep Female Threads at Bottom.
Bracket Termination, BRKTTERM.
1" Pole Mount, PADPT1.
3/4" Pole Mount, PADPT75.
Mast Mount, BRKTMMT
Rail Mount, RAILMT


Top
BLK Hard Coat Aluminum

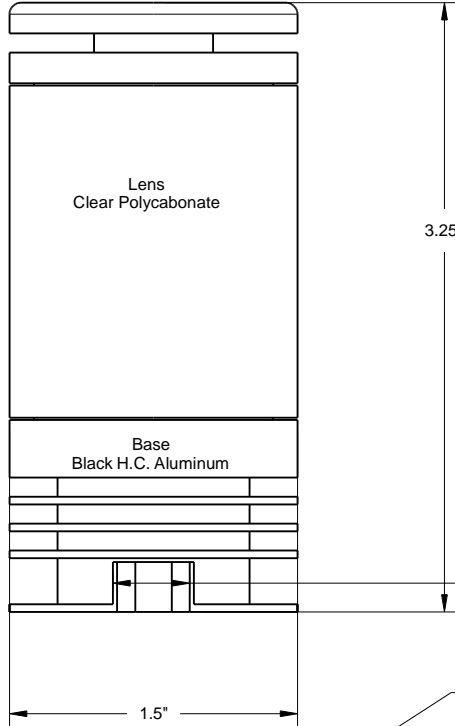

Cable Exit Vertical or Horizontal

CableExit Vertical or Horizontal

1/4 x 20 x 3/8" Deep Female Threads for Mounting



Signal Mate, LLC

SIZE A	DWG NO. 112.225.002	Marine Vessel LED Navigation Light www.SignalMate.com	REV
DATE 7/15/2014	MFG Signal Mate	SHEET 1 of 1	

